BUBO 2.0

IP66 IK08 EN 62471 RG2 H_2O 41 ALU 40 FE 70 GL 07 O

B1G

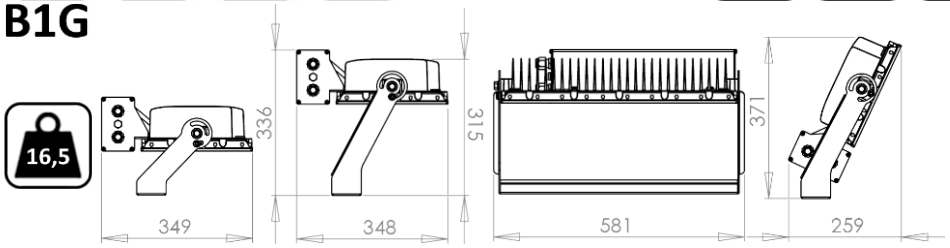



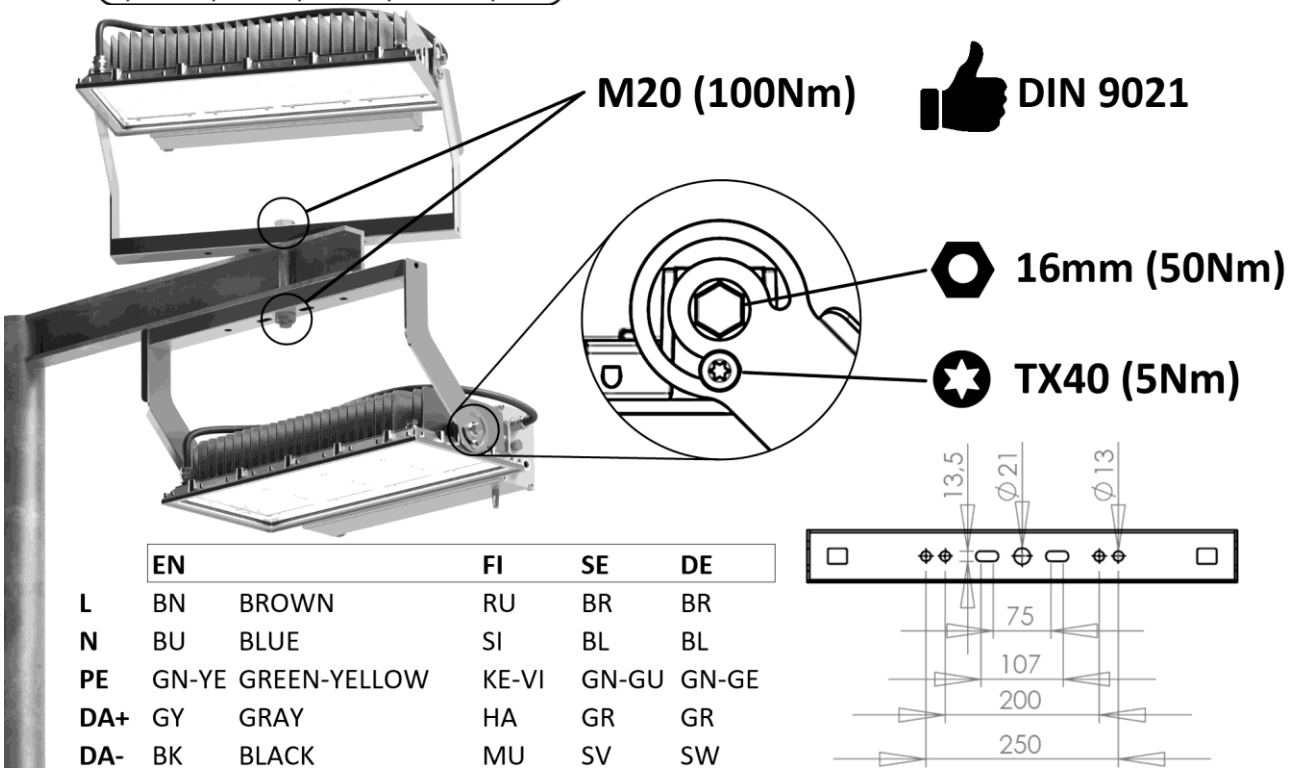

	EN		FI	SE	DE
L	BN	BROWN	RU	BR	BR
N	BU	BLUE	SI	BL	BL
PE	GN-YE	GREEN-YELLOW	KE-VI	GN-GU	GN-GE
DA+	GY	GRAY	HA	GR	GR
DA-	BK	BLACK	MU	SV	SW

Number of luminaires per circuit breaker 230VAC					TYPE B					TYPE C				
	LEDs		I_{in}	GEAR	10A	16A	20A	25A	32A	10A	16A	20A	25A	32A
Bubo B1	136 -	1200	2,2 A	BGS D4i	3	5	6	7	9	3	5	7	9	11
	120 -	1400	2,3 A	BGS	4	6	8	10	13	4	6	8	10	13
		1200	2,0 A	BGS D4i	3	5	6	7	9	4	6	8	10	12
				BGS	5	8	10	13	16	5	8	10	13	16
		1050	1,7 A	BGS D4i	3	5	6	7	9	4	7	9	11	15
				BGS	5	9	11	14	18	5	9	11	14	18
	96 -	1200	1,6 A	BGS	4	6	8	10	13	6	10	12	15	20
		1050	1,4 A	BGS	4	6	8	10	13	6	11	13	17	22
		850	1,1 A	BGS	4	6	8	10	13	6	11	13	17	22

LEDs	GEAR	Inrush current peak 230VAC 50/60 Hz	Earth leakage current
136 & 120	BGS D4i	14,5 A, t=2 ms (50% of Ipeak)	0,2 mA
120	BGS	< 4A (pulses greater than 1ms) 15A, t=170µs (10% of Ipeak)	0,6 mA
96	BGS	13A, t=1320µs (50% of Ipeak)	0,2 mA

- **EN**: Use safety wire in moving or vibrating installations.
  DALI connection: Luminaire has basic insulation between Low Voltage supply and control conductors.
- **FI**: Käytä turvavaijeria liikkuvissa tai tärisevissä asennuksissa.
  DALI liitäntä: Valaisimessa on peruseristys syöttöjännitteen ja ohjausjohtimien välillä.
- **SE**: Använd säkerhetsvajer i rörliga eller vibrerande installationer.
  DALI förbindelse: Armaturen har enkelisolering mellan lågvoltsförsörjningen och styrledningarna.
- **DE**: Bei beweglichen oder vibrierenden Anlagen Sicherheitsdraht verwenden.
  DALI-Verbindung: Die Leuchte verfügt über eine einfache Isolation zwischen der Niederspannungsversorgung und den Steuerleitungen.

EASY LED
tel. +358 2 737 4420
Meriniitynkatu 11
FI-24100 Salo, Finland
easyled.fi
VAT number
FI20776746

MISS NOTHING.