

S P E C I F I C A T I O N S

SALOA

INDUSTRY - RETAIL - PARKING GARAGES

EASY LED
www.easyled.fi

Sophisticated Saloa replaces old fluorescent tubes

The Saloa from Easy LED Oy is an efficient and economical luminaire to replace the old fluorescent tubing in industry, offices, retail spaces and parking garages. Saloa is available in two models. With different brackets and fittings the mounting options are versatile.

Economical Saloa lights maintenance free for over 60 000 hours. The high energy efficiency provides savings every day.

Bright Saloa offers even and pleasant light that is easy on the eyes, increases comfort and highlights the colors.


Durable Saloa is built in an aluminum housing. The interchangeable light module with polycarbonate cover makes the luminaire future proof.

Sophisticated Saloa replaces o

SALOA – Lights the office



SALOA – Scale drawings

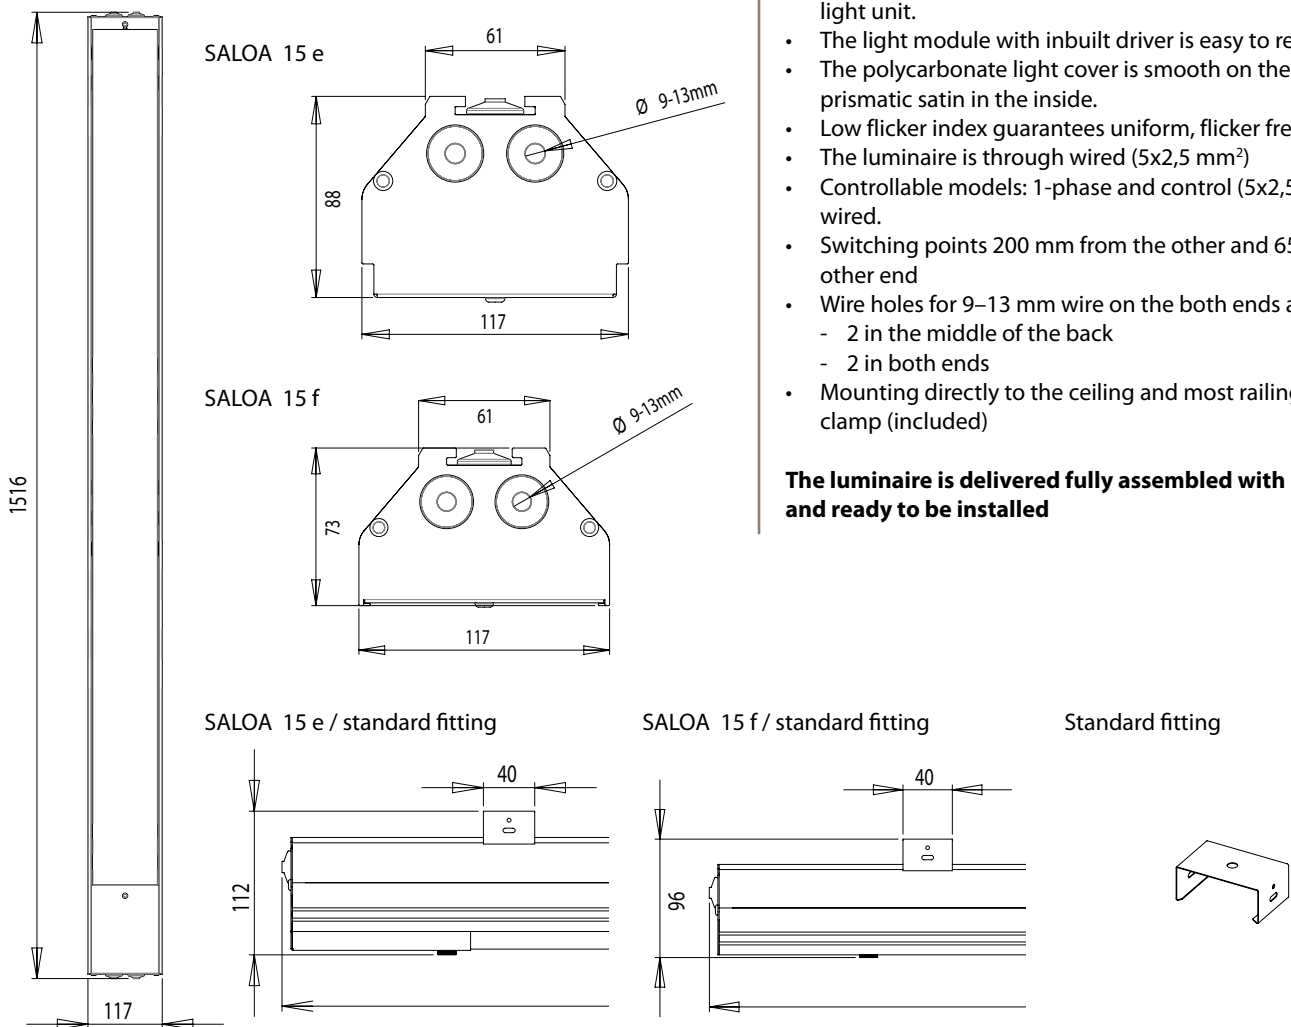

Saloa is suitable for every use

Thanks to the bright and even light, the Easy LED Saloa can be installed where ever fluorescent tubes are used nowadays. The durable construction and long maintenance free life span allow Saloa to be installed in various environments.

Economical and durable

Saloa is built in a through wired white aluminum housing and the light module is protected by a tough polycarbonate cover. The effective but efficient Saloa has a maintenance free usage life of over 60 000 hours, which makes it economical to use. The light module can be changed by user, making Saloa also easy to update.

Two models for different lighting needs

Saloa has a sleek modern design and fits in any environment. The luminaire is available in a higher e- and a recessed f-models. The higher model casts some light to the sides whereas the flatter lights only downwards.

Other:

- The luminaire is available in both higher (e) and recessed (f) light unit.
- The light module with inbuilt driver is easy to replace.
- The polycarbonate light cover is smooth on the outside and prismatic satin in the inside.
- Low flicker index guarantees uniform, flicker free light.
- The luminaire is through wired (5x2,5 mm²)
- Controllable models: 1-phase and control (5x2,5 mm²) through wired.
- Switching points 200 mm from the other and 65 mm from the other end
- Wire holes for 9–13 mm wire on the both ends and back
 - 2 in the middle of the back
 - 2 in both ends
- Mounting directly to the ceiling and most railings with a spring clamp (included)

The luminaire is delivered fully assembled with light module and ready to be installed

old fluorescent tubes

Versatile mounting options

Saloa luminaires can be mounted almost anywhere with versatile fittings and brackets. The luminaire can be mounted directly to the ceiling or a rail with the included spring clamps.

The different fittings and brackets sold separately enable various types of installations, for example hanging mounting to ceiling or adjustable installation to wall, ceiling or rail with special fittings. A side-by-side rail fitting is also available for twin installation of two luminaires. All Easy LED fittings are made of stainless steel.

The luminaires are through wired and they can be attached together with a special fastener. The replacing of the old T5/T8 fluorescent tube luminaires can be often done using the existing wiring.




| | |
|--|--|
| Housing: | Extruded aluminum profile, painted white (RAL9010) |
| Light cover: | Satin polycarbonate |
| Housing classification: | IP44 |
| Temperature range: | Designed for ambient temperatures from -40°C ... +45°C |
| Maintenance free luminaire usage life: | L90B10 30 000 h L80B10 60 000 h |
| Control: | DALI control available. |
| Input voltage: | 230 VAC (195,5-253 VAC) |
| Input frequency: | 50/60 Hz |
| Power Factor (PF) typical: | >0,95 |
| System power [W]: | 78 W |
| Current [A]: | 0,35 A (230 VAC) |
| Luminous flux [lm]: | 7850 lm (Saloa 15 e) 7150 lm (Saloa 15 f) |
| Standard light color: | 4000 K |
| Color Rendering index (CRI): | >80 R _a (85 R _a typical) |
| Luminaire luminous efficacy typical* | 101 lm/W (Saloa 15 e) 92 lm/W (Saloa 15 f) |
| Flicker Index: | 0,07 |
| Weight: | 4,0 kg |
| Dimensions (LxWxH): | 1516 x 117 x 88 mm (Saloa e) 1516 x 117 x 73 mm (Saloa f) |
| Standard installation height: | 3-5 m |
| Guarantee: | 5 years |


*Values shown are nominal values and are subject to +/- 10 % tolerance. For latest values, ask for light distribution files.

SALOA – Light distribution

SALOA 15 e

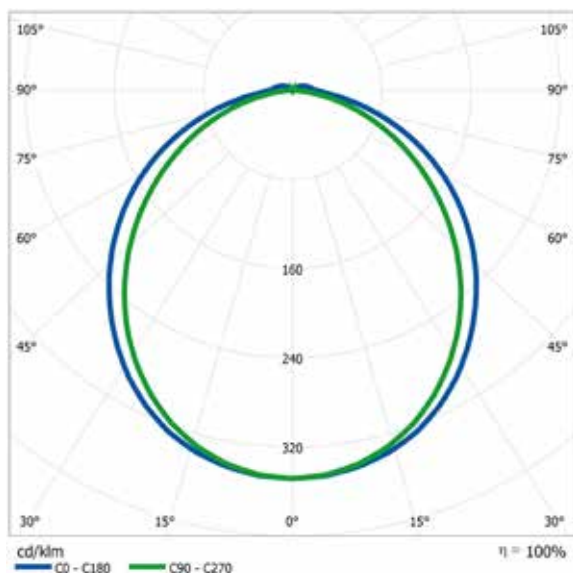

SALOA 15 f

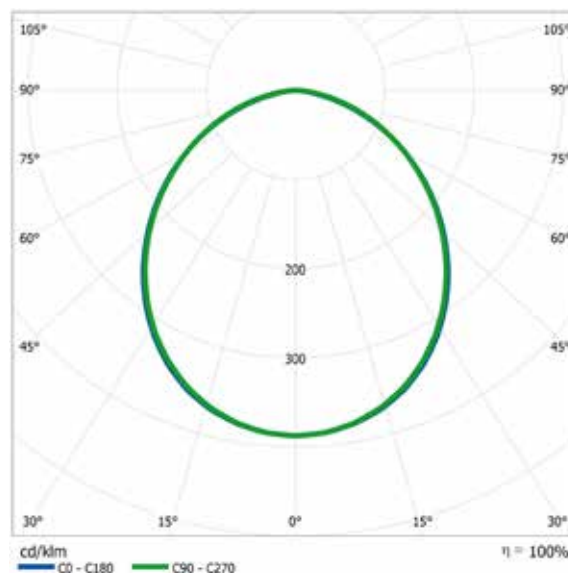



EASY LED - THE BRIGHTEST CHOICE

Investing in high quality LED lighting will give you value for now and far in the future. Easy LED Oy is a Finnish company specialized in manufacturing energy efficient LED-lighting for industry, road, area, commercial, retail and office space lighting purposes.

**EASY
LED**

Easy LED Oy
Meriniitynkatu 11
24100 Salo - Finland
p. 02 737 4420

easyled.fi

