





DIMENSIONS

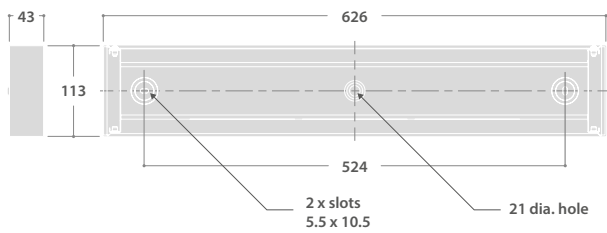

PHOTOMETRIC GUIDE



Luminaire Lumen Output
10W = 1455lm
20W = 2860lm



WALL MOUNTED UP AND DOWNLIGHTERS



SPECIFICATION

- Steel body finished full polyester non-yellowing satin white (RAL 9016) or satin black
- Opal fire-retardant polycarbonate diffusers
- Can be mounted horizontally or vertically
- Smart versions with intelligent lighting control
- SmartScan wireless technology removes the need for control cabling. Ideal for retrofit
- Integral emergency and SmartScan emergency options
- Fitted with 4000K LEDs

LED CHARACTERISTICS

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	67K - L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	>80%
REPLACEABLE	YES
POWER FACTOR	>0.95
LL/CW	130.0

For LED characteristics explanation see www.thorlux.com/led-guide

RANGE

LED	COLOUR	CAT. No.	CIRCUIT	APPROX. kg
10W	White	KT 19990	SS/D/A/L	2.0
20W	White	KT 19991	SS/D/A/L	2.0
10W	Black	KT 19992	SS/D/A/L	2.0
20W	Black	KT 19993	SS/D/A/L	2.0

CIRCUIT TYPE - suffix catalogue number with:

SS - SmartScan / **D** - Smart / **A** - dimming (DALI) / **L** - non-dimming (LED) e.g. **KT 19990SS** etc.
SmartScan and Smart add 0.1kg to weights listed

EMERGENCY VERSION - prefix catalogue number with:

EKT - Emergency
TKT - AutoTest (Not available when selecting the 'SS' suffix)

WKT - SmartScan (Only available when selecting the 'SS' suffix) e.g. **WKT 19990SS** etc.
Add 0.3kg to weights listed

SmartScan Configurations



Find out more at www.thorlux.com/smartsan